
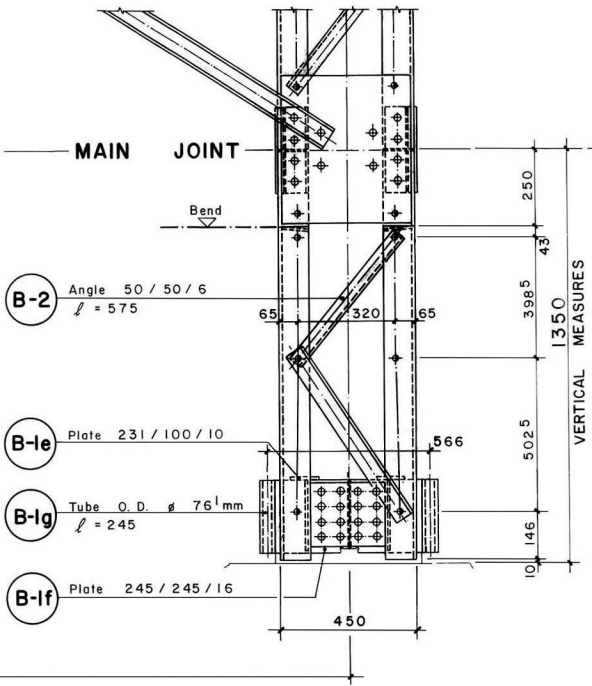



ASSEMBLY DETAIL

FRONT ELEVATION

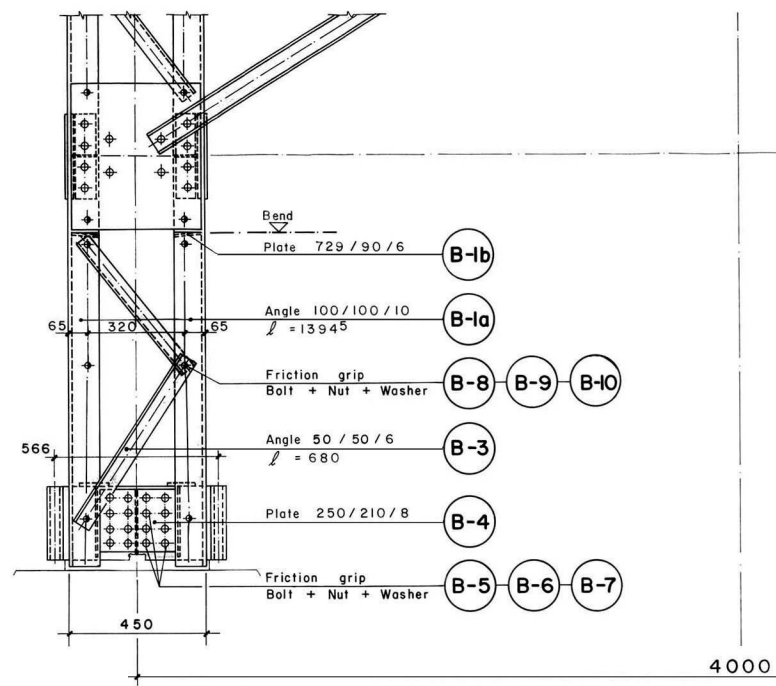

INTERMEDIATE ELEMENT
BASE ELEMENT

SIDE ELEVATION

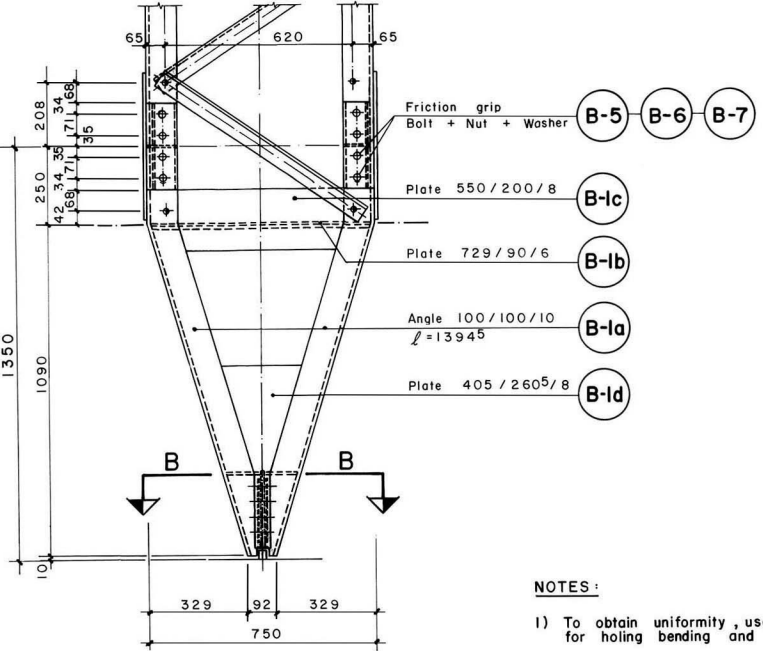


- NOTES:
- 1) To obtain uniformity, use of templates and jigs is mandatory for hoing bending and welding of assembly.
 - 2) All parts or bundles and packages with identical parts have to be labelled or marked with the respective part number by the workshop.
 - 3) "Friction grip bolt, nuts and washers" are mentioned in this drawing. However "Galvanized black grade hexagonal bolts and nuts (IS 1363, property class 4.6) and washers (IS 6610)" can be supplied!


Serial number	Item	Total weight (kg)
1	Structural steel	298.40
2	Screws, bolts, nuts, washers	27.14
Total 1 + 2		325.54

TOTAL TRANSPORTATION WEIGHT : 331.00 kg

SECTION B-B

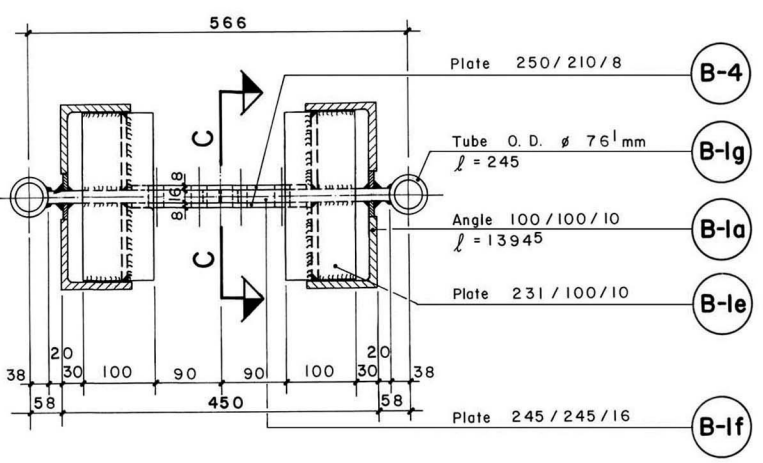

SECTION C-C

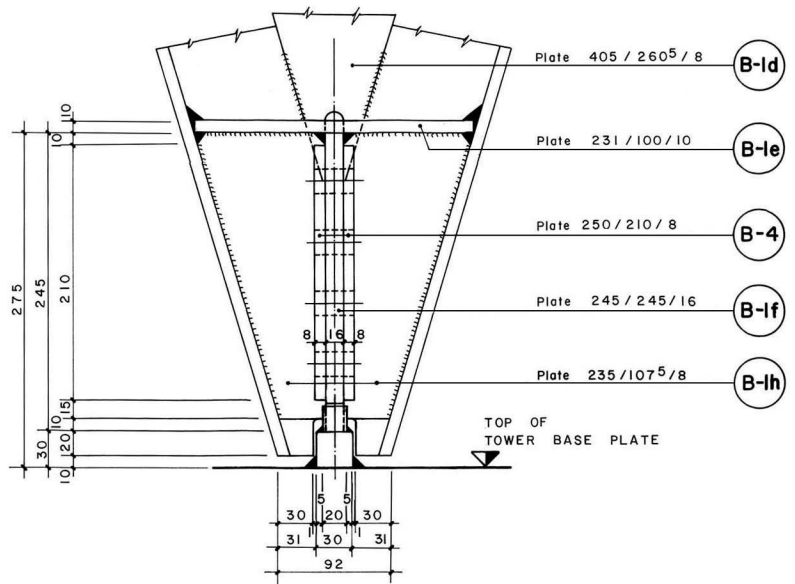

MoLD / DoLIDAR / Trail Bridge Section	
Long Span Trail Bridge Standard	
Bridge No:	Name:
Span:	
Working Drawing :	
Tower Base Element	
Standard $c_1 = 4000$ mm , $c/c_2 = 566$ mm	
Effective height : 1350 mm	
Angle : 100/100/10 mm	
$c/c_1 = 4000$ mm , $c/c_2 = 566$ mm	
Units :	1 Unit $\equiv$ Steelparts for one Tower
Date: August 2004	Drawing No. 104