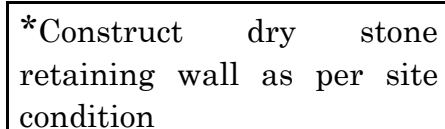


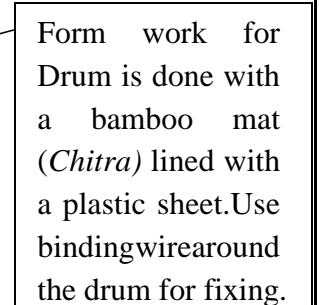


Section A-A, 1:25



Cable f mm	arrangement of anchor rods	required diameter of:		Total Volume of Drum [m³]	Required Anchor Rods f 25 mm [nos]	Stirrups f 10 mm			
		RCC Drum [cm]	rod circle [cm]			nos	cutting length [mm]	bending dia [mm]	weight kg/pc [kg]
Cable f 26		65	50	0.95	4	8	2270	530	1.40

Typical Cross Section of RCC Drum



Anchor Rods
Ribbed Tor steel f 25mm
to be place in excavated
foundation.

Type of construction		[m ³]
	Hammer dressed Stone Masonry 1:6	0.88
	Concrete 1:2:4	0.95
	Concrete 1:3:6	0.13
	Broken Stones	0.32

Date : September 30, 2002	Drawing No. 58Acon
----------------------------------	---------------------------